

Panasonic

SUBMITTAL DATA SHEET

AHU Heat Pump System	
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

Set Model	
Indoor unit model	CU-E18YAHK6
Outdoor unit model	CS-HE18YAHK6
AHRI Reference Number	
	212396486
Certified	
AHRI	
UL	




SYSTEM PERFORMANCE DATA		
Power supply		
Normal Operational Voltage	(V, Ph, Hz)	230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	16.0
Max. fuse(Outdoor)	(A)	20.0
Cooling		
Capacity	(Btu/h)	18000(5350~18700)
Power Input	(W)	1660(220~1800)
Current	(A)	7.4(2~7.9)
SEER2	(Btu/W)	17.0
EER2	(Btu/W)	10.9
Heating		
Capacity	(Btu/h)	18000(5600~18700)
Power Input	(W)	1530(340~1560)
Current	(A)	6.8(2.6~6.9)
HSPF2-4	(Btu/W)	8.8
HSPF2-5	(Btu/W)	6.9
COP	W/W	3.45
Heat at 17F(H32)	(Btu/h)	12000
Heat at 5F(H42)	(Btu/h)	11000
COP at 5F(H42)	W/W	2.00

REFRIGERANT PIPE DATA		
Throttle type	Indoor unit	EEV for cooling
	Outdoor unit	EEV for heating
Design pressure	(PSIG)	550/340
Refrigerant type		R410A
Refrigerant charge	oz	56.44
Refrigerant precharge	(ft)	25.0
	(m)	7.5
Additional charge for each ft	(oz/ft)	0.69
Additional charge for each m	(g/m)	65.0
Liquid side/ Gas side(indoor)	(inch)	3/8" / 3/4"
	(mm)	9.52/19
Liquid side/ Gas side(outdoor)	(inch)	3/8" / 5/8"
	(mm)	9.52/16
Max. pipe length	(ft)	98.4
	(m)	30.0
Max. difference in level	(ft)	65.6
	(m)	20.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	60~90
	(Deg. °C)	16~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30
Outdoor(cooling)	(Deg. °F)	5~122
	(Deg. °C)	-15~50
Outdoor(heating)	(Deg. °F)	5~75
	(Deg. °C)	-15~24

INDOOR UNIT DATA		
Indoor fan motor		
Model		ZKFD-250-8-1
Qty		1
Input	(W)	/
Output	(W)	/
RLA	(A)	14961.6
Speed(Hi/Mi/Lo)	(r/min)	/
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	617.65/576.47/529.41/488.24
Indoor noise level (Hi/Med/Lo)	[dB(A)]	34/32/30
Dehumidification		
	(L/H)	1.86
Indoor unit		
Dimension (WxDxH)	(inch)	21.02x17.52x45.00
	(mm)	534x445x1143
Packing(WxDxH)	(inch)	26.57x20.87x48.62
	(mm)	675x530x1235
Net/Gross weight	(lbs.)	105.82/129.41
	(kg)	48/58.7
Accessories		
Adaptor for welding(3/4")	Qty	1
Adaptor for welding(3/8")	Qty	1

OUTDOOR UNIT DATA		
Compressor		
Type		ROTARY
Model		KSN140D21UFZ
Brand		GMCC
Capacity	(Btu/h)	14962
Input	(W)	1140
Rated current (RLA)	(A)	9
Refrigerant oil/oil charge	(ml)	VG74 440
Outdoor fan motor		
Model		ZKFN-34-10-1-3
Qty		1
Input	(W)	/
Output	(W)	34
RLA	(A)	1.0
Speed	(r/min)	840/700/650
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	1450
Outdoor noise level	[dB(A)]	52.0
Outdoor unit		
Dimension (WxDxH)	(inch)	31.69x12.99x21.81
	(mm)	805x330x554
Packing (WxDxH)	(inch)	36.02x14.57x24.21
	(mm)	915x370x615
Net/ Gross weight	(lbs.)	75.84/81.35
	(kg)	34.4/36.9
Accessories		
Adaptor for welding(3/4")	Qty	1
Adaptor for welding(3/8")	Qty	1
Adaptor (5/8" to 3/4")	Qty	1

Indoor unit dimension

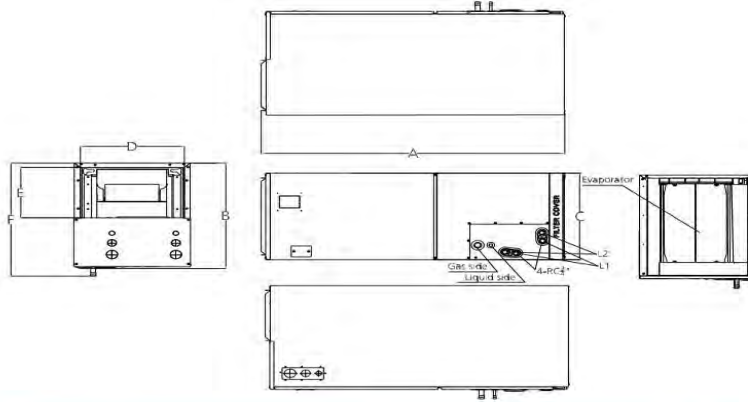

Model	Unit	Dimensions(mm)						Drain hole	
		A	B	C	D	E	F	L1	L2
18k-24k	mm	1143	534	445	400	260	585	Main drain	Overflow drain
	inch	45	21	17-1/2	15-3/4	10-1/4	23		
30k-48k	mm	1245	534	534	490	260	585		
	inch	49	21	21	19-5/16	10-1/4	23		
60k	mm	1346	534	622	580	260	585		
	inch	53	21	24-1/2	22-7/8	10-1/4	23		

Outdoor unit dimension

