Panasonic



WhisperFresh® Select Fresh Air Supply Fan

WhisperFresh Select

FV-15NLFS1H



KEY FEATURES

- Upgraded Junction box on hardwired models has 2 convenient knockouts for routing power
- Customizable fresh air supply fan featuring Pick-A-Flow® technology one fan, you choose the CFM (50-60-70-80-90-100-110-130-150 in CFM; 9 settings)
- Intelligent ECM motor with SmartFlow™ technology provides optimum CFM output for precision whole-house supply ventilation
- Operates as a stand-alone filtered supply fresh air solution to meet ASHRAE
 62.2 requirements for make-up/ supply air
- Capable of communicating with Panasonic's acclaimed WhisperGreen® Select to create a balanced ventilation solution
- Incorporates adjustable high humidity and low temperature dials for easy adjustments in any climate zone
- Pressure ports for airflow verification
- Built-in Plug 'n play module port with smart home capability
- HVI tested and certified with a MERV 13 filter (FV-FL1315NL1)
- MERV 13 filter included. MERV 8 and MERV 13 replacements available
- Can be used to comply with ASHRAE 62.2, LEED and CA Title 24

ADDITIONAL BENEFITS

- Can be used as a re-circulation filtration device in the home
- Can be used to create slight positive pressure within the home instead of using a Central HVAC
- Excellent fresh air solution in combination with ductless HVAC solutions
- Designed for use in conjunction with furnace blower in Combustion Appliance Zone (CAZ) depressurization situations
- Easy installation in new construction or retrofit homes





Specifications																Whisp	erFre	sh® S	elect 6	5" Duc	t													
		FV-15NLFS1H / MERV 13																																
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4
	Air Volume (CFM)	150	150	130	140	140	130	130	129	130	120	118	116	110	110	109	100	100	100	90	88	90	80	80	80	70	69	70	60	60	60	50	50	50
	Power Consumption (watts)	27.3	32.0	-	24.8	29.0	-	22.6	25.0	-	19.4	23.0	-	16.7	20.0	-	15.3	18.0	21.0	13.5	15.0	19.0	12.4	14.0	17.0	10.0	13.0	15.0	9.3	11.0	14.0	8.2	10.0	12.0
	Energy Efficiency (CFM/Watt)	5.49	-	-	5.65	-	-	5.75	-	-	6.19	-	-	6.59	-	-	6.54	-	-	6.67	-	-	6.45	-	-	7.00	-	-	6.45	-	-	6.10	-	-
	Speed (RPM)	1314	-	-	1265	-	-	1235	-	-	1201	-	-	1152	-	-	1121	-	-	1086	-	-	1067	-	-	1033	-	-	1012	-	-	989	-	-
	Current (amps)	0.41	0.46	-	0.26	0.42	-	0.33	0.38	-	0.29	0.34	-	0.25	0.31	-	0.23	0.28	0.32	0.20	0.25	0.29	0.18	0.22	0.26	0.16	0.21	0.24	0.15	0.18	0.22	0.13	0.16	0.21
	MAX. Current (amps)		0.46																															
	Power Rating (V/Hz)		120/60																															
Specifications	Motor Type		ECM																															
	Type of Motor Bearing		Ball																															
	Thermal Fuse Protection		N/A (Electronically-Protected Limited)																															
	Blower Wheel Type		Sirocco																															
	ENERGY STAR Qualified		Yes																															
Installation	Duct Diameter (Inches)		6"																															
	Power Cord Included		Integrated 5.8 foot power cord																															
Shipping	Gross Weight (lbs)		17.4 (7.9kg)																															
Approved Code/Standard/Regulation	UL tub/Shower Enclosure																	N/A																
	Washington VIAQ Code																	Yes																
	Wall installation																	No																
	California Title 24 Compliant																	Yes																
	Mfg in ISO 9001 Certified Facility																	Yes																
	RoHS Compliant																	Yes																

HVI-Certified performance with MERV 13 filter installed.

Features and Controls



Wi-Fi Module (WP100PBA)

Enables two-way wireless communication between ventilation products. Easily connect, monitor and control the fan's features (ie. motion sensor, light, etc.) with the Swidget® app. The Wi-Fi module can operate with a standalone fan, or can be used as part of an Indoor Air Quality healthy home system.



Reset Button – Convenient light indicator and unobtrusive alarm signal on the access panel help inform the homeowner when it's time to check and clean the (MERV 8/MERV 13) filter. Button resets every time customer changes filter.



CFM – Can be selected for 50, 60, 70, 80, 90, 100, 110, 130, or 150 CFM (9 settings).



Humidity Setting – Customized fresh air supply based on humidity conditions of incoming air. Fan will automatically shut off (or not turn on) when the outside relative humidity is higher than the setting on the humidity dial (from 30% to 80% RH).



Temperature Setting – Customized low temperature setting will shut fan off when incoming supply air is too cold. Fan will turn off (or not turn on) when the outside temperature is lower than the setting value. (From -9°C (15°F) to 4°C (40°F)). Fan automatically stops operating when the incoming air is higher than 35°C (95°F).

Accessories (Sold Separately):

FV-FL0815NL1: MERV 8 Replacement Filter



FV-FL1315NL1: MERV 13 Replacement Filter





ECM Motor with SmartFlow® Technology

WhisperFresh Select is designed to perform as rated. When the fan senses static pressure, its speed is automatically increased to ensure optimal CFM output. This feature provides peace of mind, as the installer doesn't have to worry about compromising the fan's performance, even with a complicated duct run.




Pick-A-Flow® Airflow Technology

Built-in Pick-A-Flow Airflow selector provides the unique ability to select your required airflow (50-150 CFM, in 10 CFM increments) with the simple turn of a dial.




FV-15NLFS1H



HVI-Certified performance with MERV 13 filter installed

FV-15NLFS1H

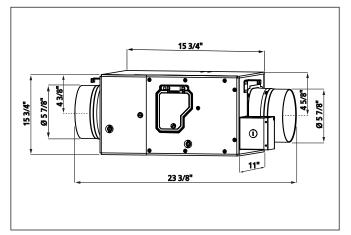

Dimensions



FV-15NLFS1H



